

AVIDITY™ SCIENCE

GENO™ CL

PURE WATER FOR THE
CLINICAL LABORATORY



Enabling science to
improve quality of life.



**OUR STRENGTH IS SUPPORTING THE
VITAL WORK OF LABORATORIES.**

The Avidity Science GENO™ CL water purification system provides a seamless supply of pure water for the daily operations in clinical laboratories. Featuring an intuitive touchscreen for ease of use and supported by our own service team, you can trust and rely on the GENO™ CL to keep your analysers running smoothly.

Developed with today's clinical laboratory in mind and manufactured in the UK to the ISO 9001:2015 standard, the GENO™ CL combines innovative features with a stylish and practical finish – the Avidity Science way.



Certificate No: FS 558309




Fully scalable water supply to meet the ever changing demands in your clinical laboratory

THE AVIDITY SCIENCE GENO™ CL SERIES

- **Continuous water supply**, for varying workflows, removing the stress from ongoing contingency planning
- **CLSI-CLRW compliant water**, maintaining accuracy and integrity of your results
- **Predictable running costs** for managed service contracts

The **GENO™ CL** utilises proven water purification technologies to produce CLRW grade purified water and sets a new standard for the supply of clinical analysers across the industry.

Featuring innovative twin stream water purification technology to provide the resilience required by modern clinical laboratories without the need for multiple water purification units, saving valuable space within your laboratory.

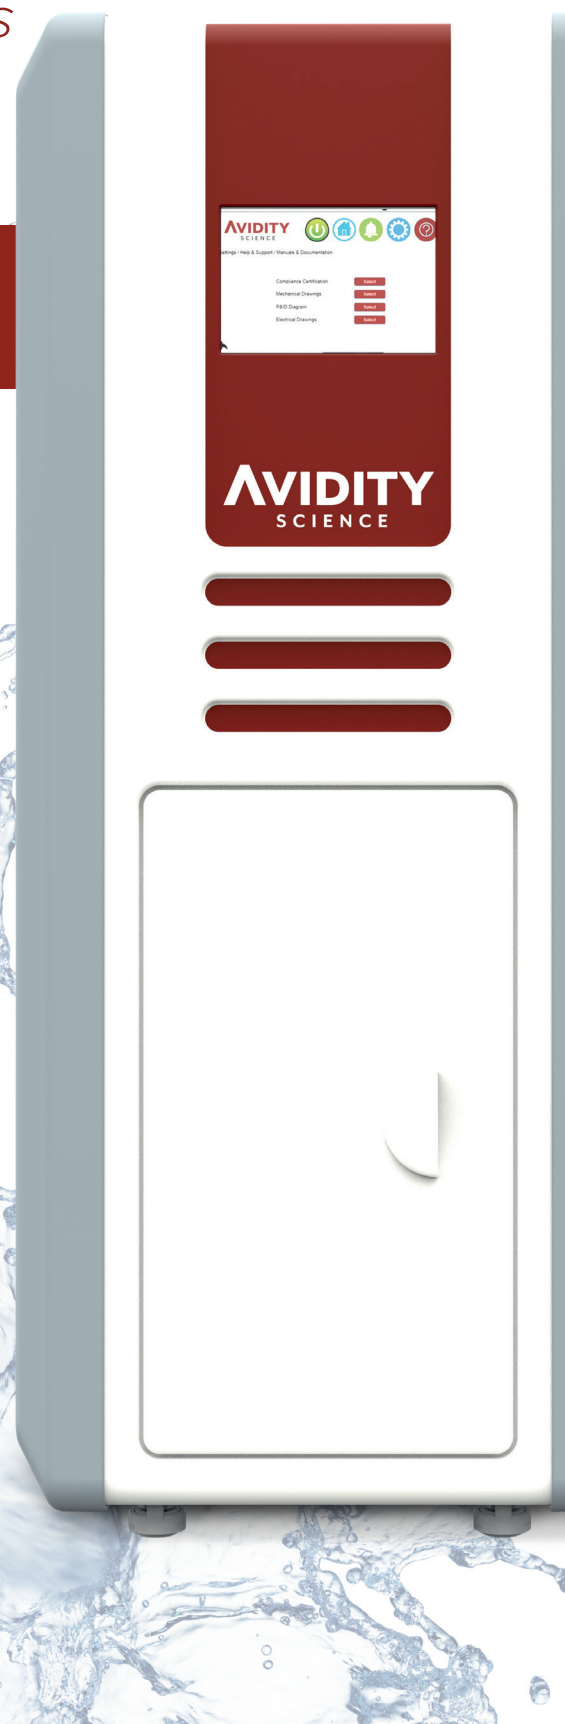

Rest assured, your water will flow with the flexible, intuitive GENO™ CL

Flexibility and Scalability provided by unique Electrodeionisation-Cassette Technology (EDI-CT)

- EDI gives consistent quality with predictable running costs
- Each cassette holds an EDI cell and degasser
- A separate cassette holds the RO module and pump allowing the end user to increase capacity with growing demand

A continuous water supply regardless of demand

- EDI-CT allows duplex production from one system, providing built-in contingency
- Each stream works independently, ensuring no single point of failure
- Cassettes can be independently replaced with minimal downtime and intervention

Cloud based diagnostics and data logging

- Data logging via secure link to protected cloud storage
- Remote diagnostics via an Ethernet or 4G connection
- Common fault output for connection to Building Management System

Easy to use icon based interface


- 10" High Resolution Touchscreen
- Intuitive, pictorial settings, reducing language barriers
- Password protected interface
- Alarm warnings with a two stage, time and date stamp
- Consumable reminder with on screen video user guides

SMART ASSISTANCE:


- + Easy to use on-site maintenance saving you valuable time and service callouts
- + Video tutorials easily accessed from 10" touchscreen
- + All main consumables located at front for ease of access



(EDI-CT Cassette)

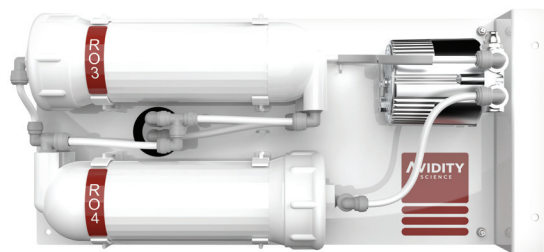

(Easy to change RO Cassette)



	Message	Triggered	Cleared
0	Break Tank Low Level	29.07.2019 00:23:46	
1	Distribution Tank Low Level	29.07.2019 00:24:28	29.07.2019 00:27:34
2	Break Tank Low Level	29.07.2019 00:22:26	29.07.2019 00:23:35
3	EDI Quality Too Low	29.07.2019 00:20:10	29.07.2019 00:22:20
4	Distribution Tank Low Level	29.07.2019 00:20:15	29.07.2019 00:22:19
5	Break Tank Low Level	29.07.2019 00:20:22	29.07.2019 00:22:19
6	Distribution Tank Low Level	29.07.2019 00:15:46	29.07.2019 00:18:40
7	Break Tank Low Level	29.07.2019 00:10:24	29.07.2019 00:14:34
8	EDI Quality Too Low	29.07.2019 00:07:31	29.07.2019 00:07:38

(Touch Screen showing alarm interface)



Technical Specifications

SYSTEM CAPABILITIES

PRODUCT WATER SPECS	GENO™ 50 CL	GENO™ 100 CL / CLD	GENO™ 150 CLD	GENO™ 200 CLD
Makeup flowrate (L/hr) @ 20°C	50	100	150	200
Inorganics (MΩ-cm at 25°C)	>10	>10	>10	>10
Organics (TOC ppb)	<30	<30	<30	<30
Bacteria (CFU/mL)	<10	<10	<10	<10
Particles (at µm filter)	0.2	0.2	0.2	0.2
Silica (mg/L)	<0.05	<0.05	<0.05	<0.05
Delivery flowrate (L/min @ 1 bar)	7.5	7.5	7.5	7.5

SYSTEM REQUIREMENTS

FEED WATER	GENO™ 50 CL & GENO™ 100 CL / CLD	GENO™ 150 CLD & GENO™ 200 CLD
Pressure (Bar)	1 to 6	1 to 6
Flow (L/hr)	190	380
Hardness as CaCO ₃ (ppm)	<20	<20
Temperature (°C)	<25*	<25**
Conductivity*** (µS/cm)	10 to 2000	10 to 2000
Free Chlorine (ppm)	<0.2*	<0.2**
Carbon Dioxide*** (ppm)	<30	<30
pH	4 to 10	4 to 10

UNIT SPECIFICATIONS

ALL MODELS	
Dimensions (HxWxD)	1852 x 750 x 600mm
Working Depth	800mm
Net Weight	182kg
Operating Weight	292kg
Maintenance Access	450 x 800mm
Power Supply	110 - 230V ~; 50/60Hz; 1160W (max)

CONSUMABLES & ACCESSORIES


PART NUMBER	DESCRIPTION	TYPICAL ANNUAL REQUIREMENT
TC003	UV Lamp	12 Months
TC005	Air Vent Filter	12 Months
TC041	EDI Cell 50 - 100L/h	As Required
TC042	RO Membrane	2 - 3 Years
TC043	20" Carbon Pre-filter	3 Months*
TC044	DI Cartridge	3 Months*
TC045	0.2µm Clamp	6 Months
TC046	Degasser Air Filter	6 Months
TC047	Degasser Membrane	2 - 3 Years

* Calculated at operation of 12 hours per day, filter change every 6 months

** Calculated at operation of 12 hours per day, filter change every 3 months

*** FCE (Feed Conductivity Equivalent) means conductivity + (ppm CO₂ x 2.66) + (ppm SiO₂ x 1.94)

* Depending on water consumption

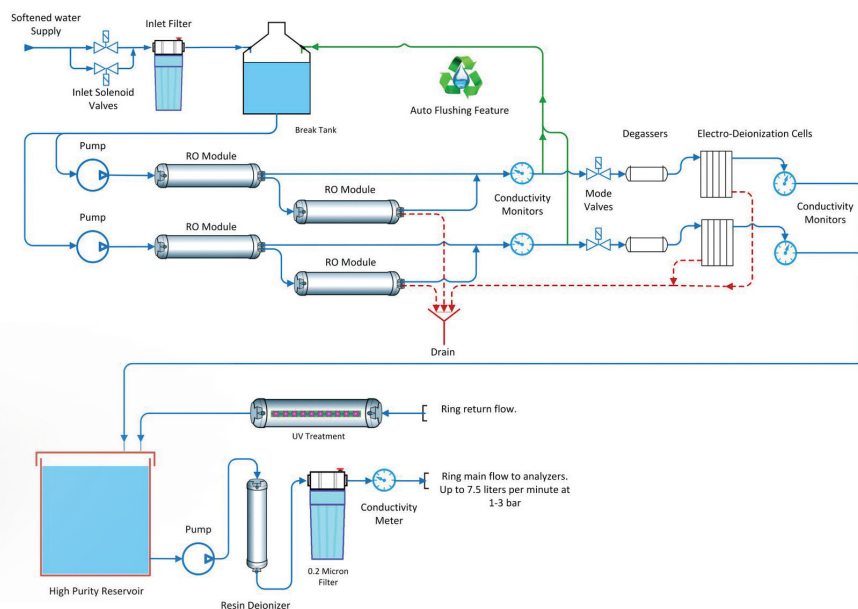

Avidity Science LLC

819 Bakke Avenue
Waterford, WI, 53185 US

262-534-5181

US.Info@AvidityScience.com
www.AvidityScience.com

Avidity Science Ltd

Unit D4 Drakes Park, Long Crendon Ind Est
Buckinghamshire, HP18 9BA, UK

+44 (0)1844 201142

EMEA.Info@AvidityScience.com
www.AvidityScience.com

Avidity Science (Zhejiang) Co., Ltd

Bld F, No. 1332, WanGuo Road, EDZ,
Jiaxing, Zhejiang, China

341001

CH.Info@AvidityScience.com
www.AvidityScience.com

Avidity Science, K.K.

Izumi Akasaka Building 6th Floor, 2-22-24
Akasaka Minato-ku, Tokyo

107-0052

JP.Info@AvidityScience.com
www.AvidityScience.com